

# Water Heaters

- Exclusive Rheemglas tank lining resists corrosion and prolongs tank life
- Anode rod equalizes aggressive water action
- Patented R-Foam insulation process for superior heat retention
- Isolated tank design reduces heat loss
- Certain models meet HUD Manufactured Home Construction and Safety Standards, ASHRAE 90A-80 and National Appliance Energy Conservation Act (NAECA) requirements
- Certain gas models have field convertible controls for natural or LP operation
- Relief Valve include with all models



| Stock # | U.S. GAL. | # of Elements | Volts | Weight | Conn. | Height Inches | Dia. | Watts/ BTU |
|---------|-----------|---------------|-------|--------|-------|---------------|------|------------|
|---------|-----------|---------------|-------|--------|-------|---------------|------|------------|

### One Year Warranty

#### ELECTRIC

|                 |    |   |     |     |      |         |         |      |
|-----------------|----|---|-----|-----|------|---------|---------|------|
| <b>0431705*</b> | 30 | 2 | 240 | 70  | Side | 45-1/2" | 17-3/4" | 3500 |
| <b>0431739*</b> | 30 | 2 | 240 | 91  | Side | 30"     | 21-3/4" | 4500 |
| <b>0431738*</b> | 30 | 1 | 120 | 91  | Side | 30"     | 21-3/4" | 1700 |
| <b>0431712*</b> | 40 | 2 | 240 | 94  | Top  | 46-1/2" | 19-3/4" | 4500 |
| <b>0431714*</b> | 40 | 2 | 240 | 94  | Side | 46-1/4" | 19-3/4" | 4500 |
| <b>0431711*</b> | 40 | 2 | 240 | 94  | Side | 46-1/4" | 19-3/4" | 3500 |
| <b>0431718*</b> | 50 | 2 | 240 | 105 | Top  | 57"     | 19"     | 4500 |

\*HUD approved (5 year warranty).

### Five Year Warranty

#### NATURAL GAS SEALED COMBUSTION DIRECT VENT

|                 |    |     |     |     |          |         |         |        |
|-----------------|----|-----|-----|-----|----------|---------|---------|--------|
| <b>0431724*</b> | 30 | n/a | n/a | 110 | Side/Top | 57"     | 17-3/4" | 30,000 |
| <b>0431726*</b> | 40 | n/a | n/a | 125 | Side/Top | 57-1/2" | 19-3/4" | 30,000 |

\*HUD approved (5 year warranty).

### Six Year Warranty\*

#### ELECTRIC

|                 |    |   |     |     |      |         |         |      |
|-----------------|----|---|-----|-----|------|---------|---------|------|
| <b>0431703</b>  | 20 | 1 | 120 | 69  | Side | 25-1/4" | 19-3/4" | 1500 |
| <b>0431706*</b> | 30 | 2 | 240 | 70  | Side | 45-1/2" | 17-3/4" | 4500 |
| <b>0431708</b>  | 30 | 2 | 240 | 83  | Top  | 30"     | 22-1/4" | 4500 |
| <b>0431740</b>  | 30 | 2 | 240 | 91  | Side | 30"     | 21-3/4" | 4500 |
| <b>0431710</b>  | 30 | 1 | 120 | 83  | Top  | 30"     | 22-1/4" | 1500 |
| <b>0431741</b>  | 30 | 1 | 120 | 83  | Side | 30"     | 21-3/4" | 1500 |
| <b>0431742*</b> | 30 | 1 | 240 | 70  | Side | 45-1/2" | 17-3/4" | 3500 |
| <b>0431743*</b> | 40 | 1 | 240 | 94  | Side | 46-1/4" | 19-3/4" | 3500 |
| <b>0431717</b>  | 38 | 2 | 240 | 108 | Top  | 31-1/2" | 23"     | 4500 |
| <b>0431715*</b> | 40 | 2 | 240 | 94  | Side | 46-1/4" | 19-3/4" | 4500 |
| <b>0431735</b>  | 40 | 2 | 240 | 95  | Top  | 46-1/2" | 19-3/4" | 4500 |
| <b>0431719</b>  | 50 | 2 | 240 | 117 | Top  | 46"     | 21-3/4" | 4500 |

\*HUD approved (5 year warranty).

### Five Year Warranty\*

#### NATURAL

|                 |    |         |     |          |         |         |        |
|-----------------|----|---------|-----|----------|---------|---------|--------|
| <b>0431721*</b> | 30 | 3" VENT | 100 | Side/Top | 59-3/4" | 16-1/8" | 30,000 |
| <b>0431723*</b> | 40 | 3" VENT | 120 | Top/Top  | 61-3/4" | 18-1/8" | 32,000 |

\*HUD approved (5 year warranty).

## Vent Packages

for Propane Gas Sealed  
Combustion Water Heaters

- 0431748** 12"
- 0431749** 17" - 32"
- 0431750** 32" - 60"
- 0237958** Ceiling Ring



## Screw-In Immersion

1" NPT no-taper screw plug. Fits many models of Rheem, State, Ruud, Norge and others. Includes one gasket.

- 0431600** 1750W-120V; 25/Ctn.
- 0431601** 1500W-120V; 25/Ctn.
- 0431602** 4500W-240V; 50/Ctn.
- 0431603** 3500W-240V; 50/Ctn.
- 0431604** 2000W-120V; 25/Ctn.
- 0431607** 3000W-240V; 12/Ctn.



## Square Flange

2-1/2" square, flat surface, 2-1/2" bolt circle, 1-49/64" bolt centers. Includes one gasket. 50/Ctn.

- 0430702** 1500W-120V; 50/Ctn.
- 0430703** 4500W-240V; 25/Ctn.



## Universal Flange

2-1/2" square flange with raised corners. 2-1/2" bolt circle, 1-49/64" bolt centers. Includes one regular "O" ring. 25/Ctn.

- 0431201** 1500W-120V
- 0431204** 3500W-240V
- 0431203** 4500W-240V



## Open Coil Elements

Seven porcelain discs. Stainless steel rod withstands 1300° constant temperature, and the machine-twisted terminal loops insure against burnouts. 50/Ctn.


- 0430503** 1500W-120V
- 0430504** 2000W-240V
- 0430502** 1750W-120V



## Gas Valve

Convertible gas valve for mobile home heaters. 1-1/2" shank.


- 0430415** Sealed Combustion
- 0430416** Atmospheric



## Telescoping Gas Stack and Flue Pipe

Overall length:  
22-7/8" with flue pipe  
NOT extended.

53-1/2" with  
flue pipe fully  
extended.

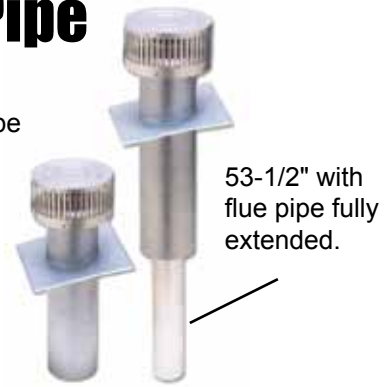


For use with propane gas water heaters. Pulls air from inside of home and vents exhaust out of top of home. Flange has 12° angle for sloped roofs. Extends 8-3/4" above roof line.

- 0425195** 4/Ctn.

## Universal Adapter Kit

Converts screw-in element to replace round head, flat flange and universal flange. 12/Ctn.

- 0430604**



## T & P Valve

Temperature and pressure relief valve with test lever, stainless steel spring and all bronze body. Thermostat is positive, accurate and proven. Self-closing. 50/Ctn.

- 0430120** 3/4" x 4" L
- 0432048** 3/4" x 5" L
- 0432046** 1/2" x 4" L




## Water Heater Door

**Without Vents**

- 0212000** 22" x 60"
- 0211997** 23" x 60"

**With Vents**  
(Not Shown)

- 0432050** 22" x 60"
- 0211999** 23" x 60"

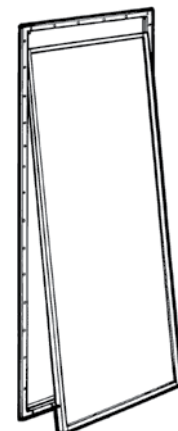

## Flexible Water Connectors

Flexible copper connector for water only.


- 0440015 24"; 25/Ctn.
- 0440010 18"; 25/Ctn.
- 0440018 Washer



## Flexible Gas Connectors

1/2" OD coated brass tubing 1/2" FPT x 1/2" MPT (tapped 3/8" FPT). Approved for indoor and outdoor use. AGA listed.


- 0250815 18"
- 0250816 24"
- 0250817 36"

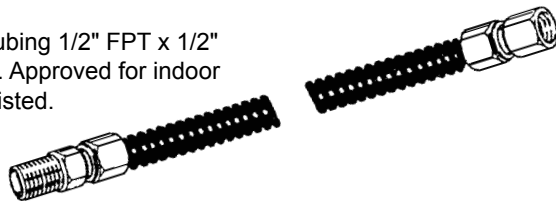

## PEX Water Heater Swivel Connectors


3/4" insert x 3/4" FPT for PEX tubing & pipe.

- 0440017

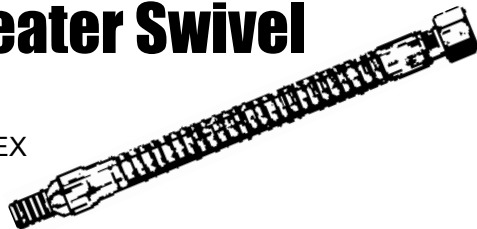

## Shark Bite Push-On Water Heater Connector

- 0440012 3/4" FIP x 3/4" shark bite x 24" long

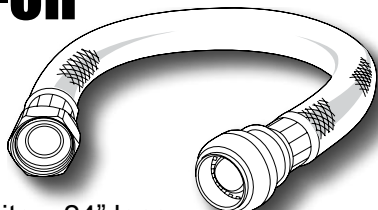

## Waterway Connector

For water heater inlet and outlet hookup plus other uses, where dissimilar metals occur in piping and plumbing systems. 3/4" MPT x 3/4" MPT x 3" length MIP. Thermoplastic lining prevents corrosion. Bulk.

- 0431625



## Drip Pan

Plastic polymer, semi-flexible. Pre-drilled to accept furnished 1" PVC plastic fitting. Meets requirement of Southern Building Code.

- 0260155 22"; 12/Ctn.
- 0260156 24"; 12/Ctn.



## Drain Tool



- 0380150

## Water Heater Insulation

Vinyl-backed Fiberglass Insulation is designed for gas, oil, and electric water heaters up to 60-gallon capacity. Available in a choice of thicknesses to offer you greater R-values.



- 0270500 2" thick x 48" x 75" R6.7
- 0270501 3" thick x 48" x 75" R10

## Water Heater Thermocouple

Fully universal. Fits push-in, screw-in or clamp-on type pilot burners. 24/Ctn.

- 0232501 18"
- 0232502 24"
- 0232503 30"



## Continuity Tester

Tests elements and thermostats while they are in the water heater. LED light indicates continuity. Unbreakable body with protective covers over light and probe.

- 0382006 12/Ctn.



## T-stat

Replacement for any electric, domestic water heater.

- 0431901 Double-throw 240V
- 0431904 Thermo Disc 1-Pole
- 0431906 Lower Thermostat.

